



REFLEXOR.

SONOPAN II

SOUNDPROOFING SYSTEMS
FOR WALLS & CEILINGS

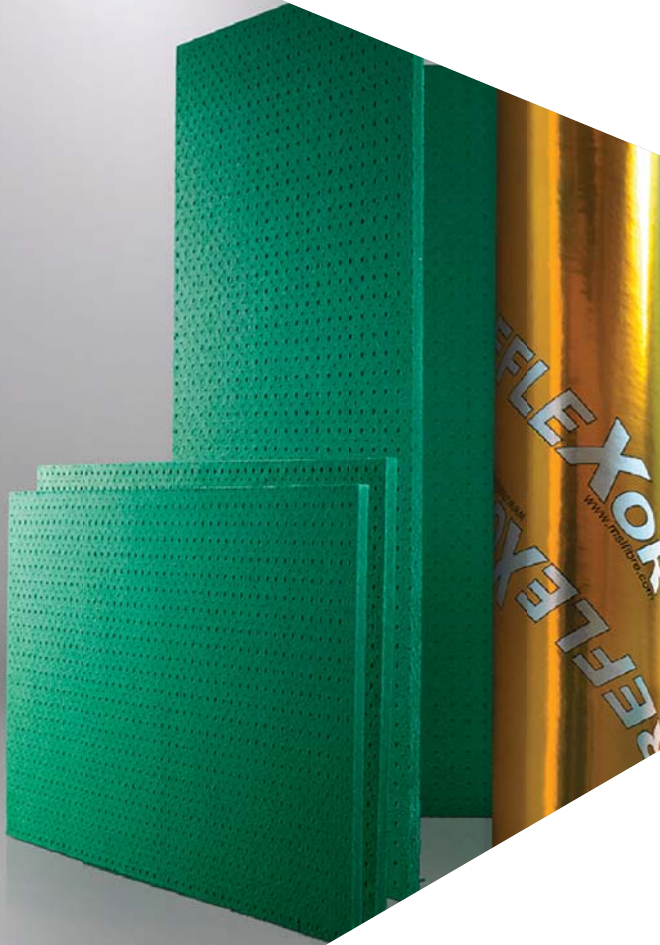


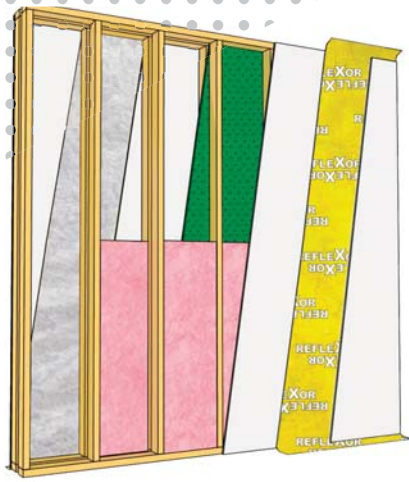

STC 63


Drywall	15.86 mm (5/8")
Reflexor	1.7mm (1/16")
Drywall	15.86 mm (5/8")
Fibreglass insulation	88.9 mm (3 1/2")
2 x 4 Wood studs	38 x 89 mm (1 1/2" x 3 1/2")
SONOpan II	19 mm (3/4")
Air space	25 mm (1")
2 x 4 Wood studs	38 x 89 mm (1 1/2" x 3 1/2")
Fibreglass insulation	88.9 mm (3 1/2")
Drywall	15.86 mm (5/8")
Reflexor	1.7mm (1/16")
Drywall	15.86 mm (5/8")

1 hour Fire rating • CAN/ULC S101 • ANSI UL 263
 UL: U309, U314, U423, U425, U465
 ULC: W301, W415, W453

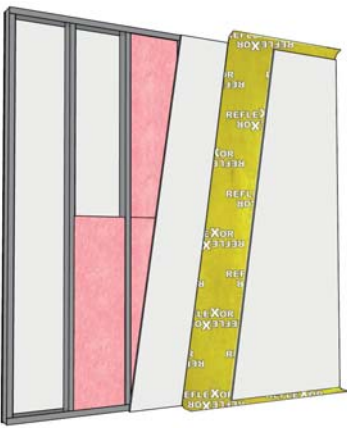


STC 52

Drywall	15.86 mm (5/8")
Fibreglass insulation	88.9 mm (3 1/2")
Metal studs	92 mm (3 5/8")
Drywall	15.86 mm (5/8")
Reflexor	1.7mm (1/16")
Drywall	15.86 mm (5/8")

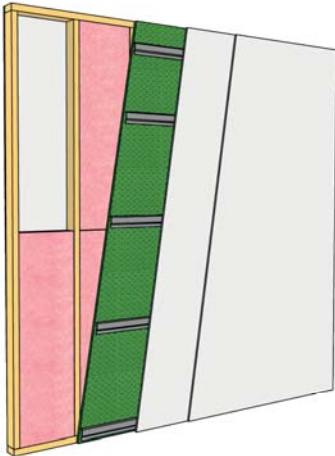

STC 56

Drywall	15.86 mm (5/8")
Fibreglass insulation	88.9 mm (3 1/2")
2 x 4 Wood studs	38 x 89 mm (1 1/2" x 3 1/2")
SONOpan II	19 mm (3/4")
Resilient channels at 406 mm o.c.	12.7 mm (1/2")
Drywall	15.86 mm (5/8")
Drywall	15.86 mm (5/8")

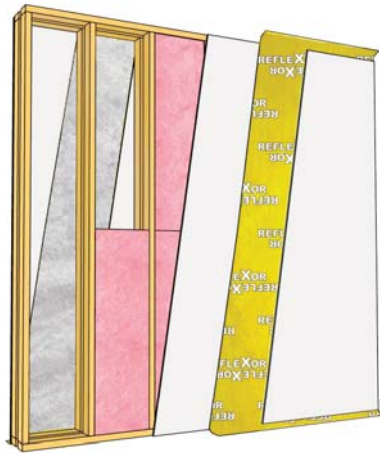

ASTC 62

Drywall	13 mm (1/2")
Reflexor	1.7mm (1/16")
Drywall	15.86 mm (5/8")
Fibreglass insulation	88.9 mm (3 1/2")
2 x 4 metal or wood studs	38 x 89 mm (1 1/2" x 3 1/2")
Air space	25 mm (1")
2 x 4 metal or wood studs	38 x 89 mm (1 1/2" x 3 1/2")
Fibreglass insulation	88.9 mm (3 1/2")
Drywall	15.86 mm (5/8")
Reflexor	1.7mm (1/16")
Drywall	13 mm (1/2")



FEATURES

- Innovative soundproofing systems designed to perform in the field
- High performance sound attenuation
- Odour and vapour barrier
- Light and easy to install
- Manufactured in Canada

SONOPAN II PROPERTIES

Panel size	1.22 m x 2.44 m	4 ft x 8 ft
Area covered / panel	2.97 m ²	32 ft ²
Thickness	19.05 mm	3/4 in
Weight / panel	11.5 kg	26 lb
Number of panels / skid	65	

100% recycled wood fibre
 0% VOC - Volatile organic compounds
 CCMC# 12419-R

REFLEXOR PROPERTIES

Roll size	1.22 m x 15.24 m	4 ft x 50 ft
Area covered / roll	18.58 m ²	200 ft ²
Thickness	1.70 mm	0.039 in
Weight / roll	9.8 kg	21.6 lb
Number of rolls / skid	39	

100% recycled polyester fibre
 0% VOC - Volatile organic compounds





MSL

Customer service
1 800 561-4279
www.mslfibre.com